




## BULLDOG SEAL Data Sheet

Acme Req No: 0203098

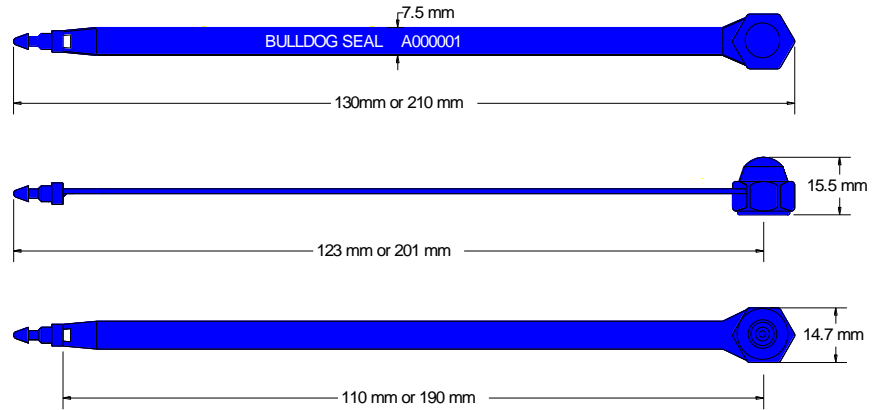

The Acme **Bulldog Seal** is a fixed length seal manufactured from two dissimilar materials. The Acetyl insert is durable and will withstand freezing and boiling conditions, whilst the polypropylene body is flexible for easy use. The design includes rolled heat staking technology to secure the insert to the body, which provides clear evidence of tampering if forced open or cut and a break off point for easy removal. This seal is ideal for securing vehicle doors and fire doors but is also suitable for other sealing requirements.

### Technical Data

#### Recommended Applications

Airline Cargo, Trailers, Containers, Rail freight, Plantations, Refineries, Vehicles, Fire doors, Lockers.

#### Material

Body - Polypropylene  
Insert - Acetyl

#### Available Operating Lengths

(L1) 11cm (overall 13cm)  
(L2) 19cm (overall 21cm)

#### Strap Width

7.5mm

#### Average Breaking Strength

20kg

#### Marking

Laser or Foil marking  
Consecutively numbered as standard  
Optional Customer name/logo  
Optional Laser Barcoding

#### Colours

Foil marked: red, blue, green, yellow, orange, black, white  
Laser or foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white.  
Other colours may be available on request.

#### Packaging

Standard Packaging : 10 per mat and 1,000 seals/carton  
Carton Dimensions : (L1) - 33cm x 25.4cm x 25.6cm  
                              : (L2) - 33cm x 25.4cm x 25.6cm  
Carton weight : (L1) - 3.0kg/carton  
                              : (L2) - 3.7kg/carton