




BULLDOG SEAL Data Sheet

Acme Reg No: 0203098

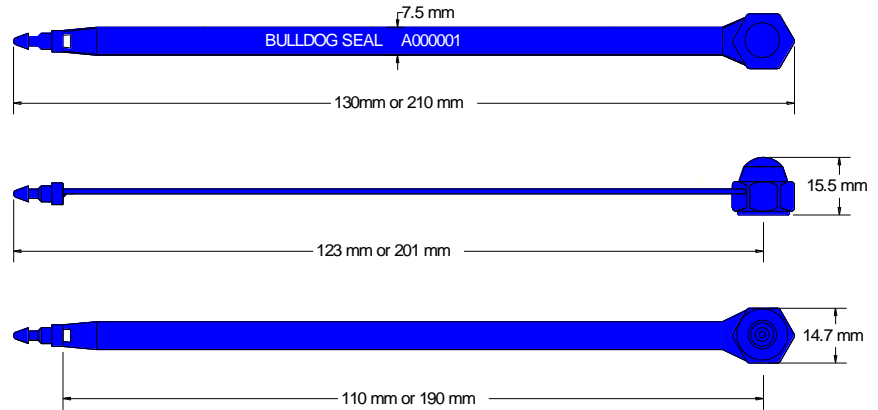

The Acme **Bulldog Seal** is a fixed length seal manufactured from two dissimilar materials. The Acetyl insert is durable and will withstand freezing and boiling conditions, whilst the polypropylene body is flexible for easy use. The design includes rolled heat staking technology to secure the insert to the body, which provides clear evidence of tampering if forced open or cut and a break off point for easy removal. This seal is ideal for securing vehicle doors and fire doors but is also suitable for other sealing requirements.

Technical Data

Recommended Applications

Airline Cargo, Trailers, Containers, Rail freight, Plantations, Refineries, Vehicles, Fire doors, Lockers.

Material

Body - Polypropylene with Biodegradable additives
 Insert – Acetyl with Biodegradable additives

Available Operating Lengths

(L1) 11cm (overall 13cm)
 (L2) 19cm (overall 21cm)

Strap Width

7.5mm

Average Application Breaking Strength

20kg

Marking

Laser or Foil marking
 Consecutively numbered as standard
 Optional Customer name/logo

Colours

Foil marked: red, blue, green, yellow, orange, black, white
 Laser or foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white.
 Other colours may be available on request.

Packaging

Standard Packaging : 10 per mat and 1,000 seals/carton
 Carton Dimensions : (L1) - 31cm x 25.7cm x 24.5cm
 : (L2) - 31cm x 25.7cm x 24.5cm
 Carton weight : (L1) - 3.0kg/carton
 : (L2) - 3.7kg/carton

