




F Seal Data Sheet

Acme Reg No: 1809015

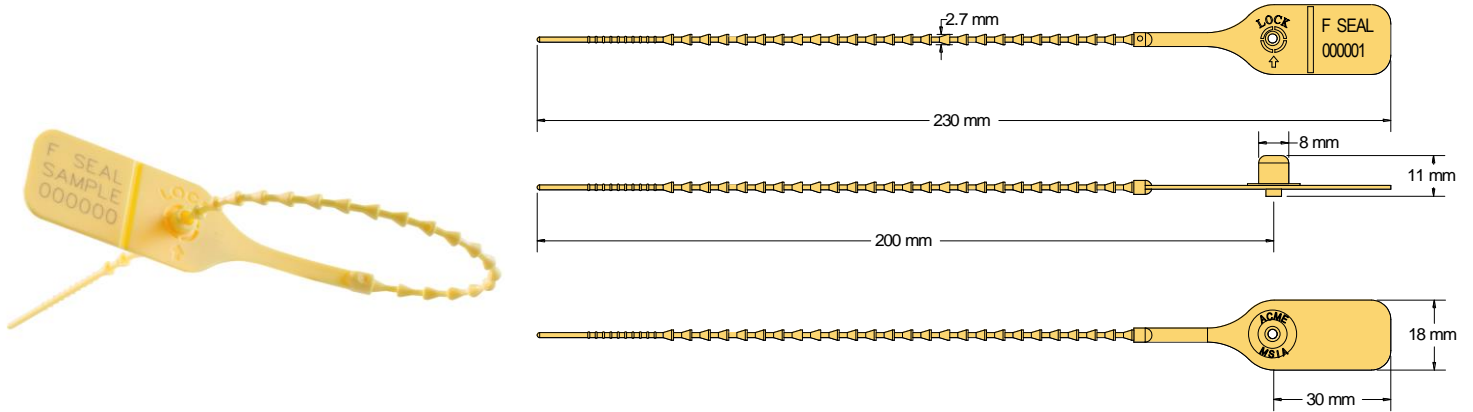

The Acme **F Seal** is a low breaking strength pull-tight seal manufactured from Polypropylene material. The seal can be supplied with a heat rolled over top to prevent tampering by intrusion into the locking head but if tampering is not the main characteristic the seal can be supplied without this added feature. With a 2.7mm diameter ribbon this seal is ideal for applications where there are small sealing apertures.

Technical Data

Recommended Applications

Catering Trolleys, Baggage, ATM Dispensers, Gaming Machines, Lockers, Tote Boxes, Fire Extinguishers

Material

Polypropylene with Biodegradable additives

Available Operating Lengths

20cm (overall 23cm)

Ribbon Diameter

2.7mm

Tag Marking Dimensions

18mm x 30mm

Average Application Breaking Strength

7kg

Marking

Laser or Foil marking
Consecutively numbered as standard
Optional Customer name/logo
Optional Laser Barcoding

Colours

Foil marked: red, blue, green, yellow, black, white.
Laser or Foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white.
Other colours may be available on request.

Packaging

Standard Packaging : 10 per mat and 1,000 seals/carton

Carton Dimensions : 29cm x 20cm x 21cm (L x W x H)

Carton weight : 1.6kg

